SEAPENG®

Professional manufacturer of tire inflation equipment



2026-01



CONTENT

01
ENTERPRISE SECTION

02
PRODUCT SECTION

01 PART

Enterprise Section

- Company Introduction
- Honor

COMPANY PROFILE

Zhuhai Haipeng Automobile Testing Equipment Co., Ltd., established in 2006, is a national high-tech enterprise and has settled in the Zhuhai National High-tech Industrial Development Zone. Since its inception, the company has been committed to innovation and development, continuously increasing research and development efforts and investment, and actively promoting the market transformation of scientific research achievements. It has obtained multiple national and international patents, and the various inflatable pressure testing products it has launched have significantly elevated the industry standard and are widely recognized by the market and consumers. Especially in terms of product intelligence and automation, it is at the forefront of the industry and internationally.

The company boasts a research and development team, production workshop, and sales team, making it a diversified and integrated enterprise. Its products are exported to both domestic and overseas markets.

Main sales countries: North America, Europe, the Middle East, Southeast Asia, etc.

Possessing qualifications: invention patents, utility model patents, design patents, CE, FCC, calibration certificates, and other 30 industry qualification certificates.

Proprietary brands: "SEAPENG" and "Taibaomu", supporting OEM and ODM.

Overview

20 Year
Professional tire inflation Equipment manufacturing experience

50 Million
Annual Sales

50+
Number of products

100W
Annual sales volume



Certificate



Our company has over 30 certificates, including CE, ROHS, WEEE, appearance patents, utility patents, invention patents, computer software copyrights, calibration certificates, etc.

02 PART

Product Section

- Tire inflator > Pages 01-11
- Tire pressure gauge > Pages 12-37
- Manometer > Pages 38-39
- Pressure gauge > Pages 40
- Other products > Pages 41-44

DP-Q01

Wall mounted: DP-Q01
Column style: DP-Q01L

Automatic LED tire inflator

Detecting tire pressure | Not affected by light | LED display | Microcomputer control

Preset pressure | Full of self-stop | High pressure resistant | High low temperature



Column style









filtration device

1. Pressure display	6. Pressure unit	11. Inflate chuck
2. Increased pressure	7. Preset pressure	12. Power cord
3. ON/OFF	8. Reduce pressure	13. Power switch
4. Air inlet	9. UNIT	14. Exhaust port
5. Air outlet	10. Tracheal hook	15. Fixed bracket

Packaging parameters

Model	Packing Size	Carton size(2PCS/CTN)
DP-Q01	41.5*32*20 cm	44.5*39.5*44cm
DP-Q01L	68*20*50.7 cm	--

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LED	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~220PSI/0.35~15BAR	Gross weight	DP-Q01:6.8Kg/DP-Q01L:13Kg (Including 10M air Pipe)

DP-Q02

Wall mounted: DP-Q02
Column style: DP-Q02L

Automatic LED tire inflator


Detecting tire pressure


Not affected by light



LED display


Microcomputer control


Preset pressure


Full of self-stop


High pressure resistant


High low temperature



Column style



filtration device



Packaging parameters	
Model	Packing Size
DP-Q02	37*21*42cm
DP-Q02L	68*20*50.7cm

1. Pressure display	6. Preset pressure	11. Power cord
2. Increased pressure	7. UNIT	12. Air inlet
3. Reduce pressure	8. ON/OFF	13. Air outlet
4. Inflate chuck	9. Tracheal hook	14. Exhaust port
5. Pressure unit	10. Power switch	15. Fixed bracket

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LED	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~220PSI/0.35~15BAR	Gross weight	DP-Q02:6.8Kg/DP-Q02L:13Kg (Including 10M air Pipe)

DP-Q03

Automatic LED tire inflator

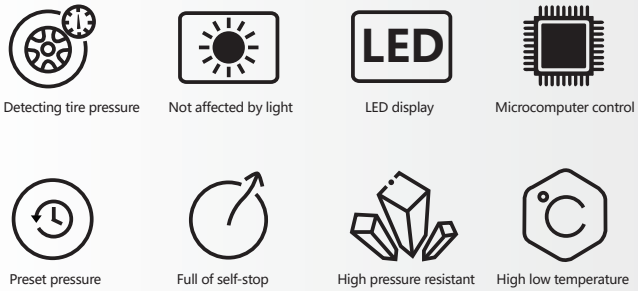



1. Pressure display	6. Fixed hole	11. Power cord
2. Increased pressure	7. Pressure unit	12. Power switch
3. Reduce pressure	8. Preset pressure	13. Exhaust port
4. Air inlet	9. UNIT	14. Inflate chuck
5. Air outlet	10. ON/OFF	15. Tracheal hook

Packaging parameters		
	Packing Size	Carton size(4PCS/CTN)
	37*21*42cm	42.5*34.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LED	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~100PSI/0.35~7BAR	Gross weight	4KG(Including 10M air Pipe)

DP-Q04

Automatic LCD tire inflator

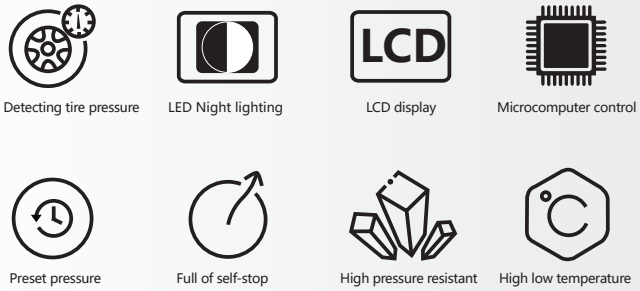



1. Pressure display	6. Fixed hole	11. Power cord
2. Increased pressure	7. Preset pressure	12. Power switch
3.Reduce pressure	8. Pressure unit	13. Exhaust port
4. Air inlet	9. UNIT	14. Inflate chuck
5. Air outlet	10. ON/OFF	15. Tracheal hook

Packaging parameters



Packing Size	Carton size(4PCS/CTN)
37*21*42cm	42.5*34.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LCD	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~100PSI/0.35~7BAR	Gross weight	4KG(Including 10M air Pipe)

DP-Q05

Automatic LED tire inflator

Detecting tire pressure

Not affected by light

LED display

Microcomputer control

Preset pressure

Full of self-stop

High pressure resistant

High low temperature



Packaging parameters		
	Packing Size	Carton size(4PCS/CTN)
	37*21*42cm	42.5*34.5*44.5cm

1. Pressure display	6. Fixed hole	11. Power cord
2. Increased pressure	7. Pressure unit	12. Power switch
3. Reduce pressure	8. Preset pressure	13. Exhaust port
4. Air inlet	9. UNIT	14. Inflate chuck
5. Air outlet	10. ON/OFF	15. Tracheal hook

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LED	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~100PSI/0.35~7BAR	Gross weight	4KG(Including 10M air Pipe)

DP-Q06

Automatic LED tire inflator


Detecting tire pressure


Not affected by light



LED display


Microcomputer control


Preset pressure


Full of self-stop


High pressure resistant


High low temperature



filtration device

1. Pressure display	6.Fixed hole	11. Power cord
2. Increased pressure	7. Pressure unit	12. Power switch
3. Reduce pressure	8. Preset pressure	13. Exhaust port
4. Air inlet	9. UNIT	14. Tracheal hook
5. Air outlet	10. ON/OFF	15. Inflate chuck

Packaging parameters



Packing Size	Carton size(4PCS/CTN)
37*21*42cm	42.5*34.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LED	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~100PSI/0.35~7BAR	Gross weight	4KG(Including 10M air Pipe)

DP-Q07

Automatic LCD tire inflator

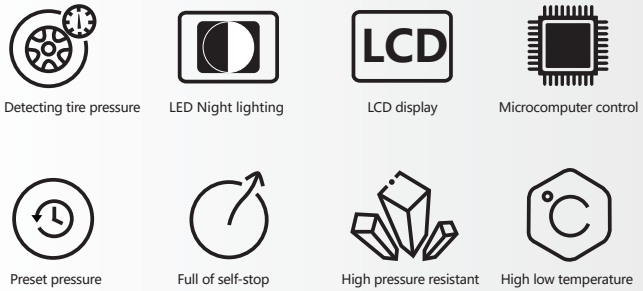



1. Pressure unit	6. Power cord	11. Air inlet
2. Reduce pressure	7. Increased pressure	12. Air outlet
3. Power switch	8. Pressure display	13. Exhaust port
4. ON/OFF	9. Preset pressure	14. Tracheal hook
5. Fixed hole	10. UNIT	15. Inflate chuck

Packaging parameters		
	Packing Size	Carton size(2PCS/CTN)
	32.3*29*18.8cm	

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LCD	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~220PSI/0.35~15BAR	Gross weight	7KG(Including 10M air Pipe)

DP-Q08

Automatic coin operated inflator

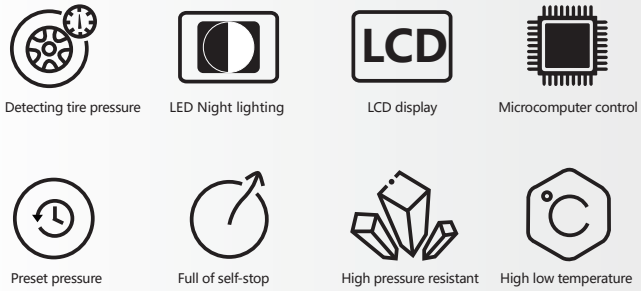



Packaging parameters	
	Packing Size
	128.5*44*21.5cm

1. Pressure display	6. Increased pressure	11. Inflate chuck
2. Reduce pressure	7. Pressure display	12. Territory
3. Power switch	8. Air outlet	13. Power cord
4. Air inlet	9. UNIT	
5. ON/OFF	10. Tracheal hook	

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LCD	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~220PSI/0.35~15BAR	Gross weight	15.8KG(Including 10M air Pipe)

DP-Q09

Automatic LED tire inflator


Detecting tire pressure


Not affected by light



LED display


Microcomputer control


Preset pressure


Full of self-stop


High pressure resistant


High low temperature



DP-Q09x2



Packaging parameters		
	Packing Size	Carton size(*PCS/CTN)
	25*21.5*16.5cm	--

1. Case	6. Power cord	11. Exhaust port
2. Pressure display	7. Preset pressure	12. Air outlet
3. Pressure unit	8. Power switch	13. Air inlet
4. Increased pressure	9. Reduce pressu	14. Inflate chuck
5. ON/OFF	10. UNIT	15. Tracheal hook

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AC 85~230V 50~60HZ
Display Mode	LCD	Power	65W
Storage temperature	-10 ~ +50℃	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Measuring range	5~100PSI/0.35~7BAR	Gross weight	1.5KG(Including 10M air Pipe)

TB-902

Handheld tire inflator


Detecting tire pressure


LED Night lighting



LCD display


Microcomputer control


Preset pressure


Full of self-stop


High pressure resistant



High low temperature


1.5M, charging cable



Packaging parameters		
	Packing Size	Carton size(6PCS/CTN)
	297*136*83mm	37.5*34.5*30cm

1. Pressure display	6.Preset pressure	11. Inflate chuck
2. Battery status	7. Pressure unit	12. Charging port
3. Mode conversion	8. UNIT	13. Exhaust por
4. Increased pressure	9. Reduce pressure	
5. ON/OFF	10. Air inlet	

Applicable Vehicle	Motorcycles, Car,Van	Power	65W
Display Mode	LCD	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Power supply mode	Built-in 2000mAh charging	Gross weight	1.1KG(Including 0.6M air Pipe)
Measuring range	5~100PSI/0.35~7BAR	Material	PA66+30%GF

TB-902E

Handheld tire inflator


Detecting tire pressure


Not affected by light



LED display


Microcomputer control


Preset pressure


Full of self-stop


High pressure resistant


High low temperature



Packaging parameters		
	Packing Size	Carton size(6PCS/CTN)
	297*136*83mm	37.5*34.5*30cm

1. Pressure display	6. Preset pressure	11. Charging port
2. Pressure unit	7. UNIT	12. Exhaust porh
3. Mode conversion	8. Reduce pressure	
4. Increased pressure	9. Air inlet	
5. ON/OFF	10. Inflate chuck	

Applicable Vehicle	Motorcycles, Car,Van	Power	65W
Display Mode	LED	Accuracy	±1PSI/±0.05BAR
Working temperature	-20 ~ +60℃	Precision resolution	0.1PSI/0.01BAR
Power supply mode	Built-in 2000mAh charging	Gross weight	1.1KG(Including 0.6M air Pipe)
Measuring range	5~100PSI/0.35~7BAR	Material	PA66+30%GF

BW-001

High precision

Tire pressure inflator gauge

Detecting tire pressure

LED Night lighting

LCD display

Inflation/deflation

Shockproof

High low temperature

Dial Color

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm





1. Pressure unit
2. ON/OFF
3. Exhaust valve
4. Inflation valve
5. Air inlet
6. Sheath
7. Battery status
8. Pressure display
9. UNIT
10. Inflate chuck
11. Battery cover

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	670g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

BW-002

High precision

Tire pressure inflator gauge

Detecting tire pressure

LED Night lighting

LCD display

Inflation/deflation

Shockproof

High low temperature





1. Pressure unit
2. ON/OFF
3. Exhaust valve
4. Inflation valve
5. Air inlet
6. Sheath
7. Battery status
8. Pressure display
9. Inflate chuck
10. Battery cover

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	670g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

BW-L01

High precision

Tire pressure inflator gauge

Detecting tire pressure

LED Night lighting

LCD display

Inflation/deflation

Shockproof

High low temperature





1. Battery status
2. ON/OFF
3. Exhaust valve
4. Air inlet
5. Sheath
6. Pressure unit
7. Pressure display
8. UNIT
9. Inflation valve
10. Inflate chuck
11. Battery cover

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	720g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

BW-E02

High precision

Tire pressure inflator gauge

Detecting tire pressure

Not affected by light

LED display

Inflation/deflation

Shockproof

High low temperature





1. Pressure unit
2. ON/OFF UNIT
3. Exhaust valve
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. Inflation valve
9. Inflate chuck
10. Battery cover

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AA*2
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	760g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

BW-L03C

High precision
charging tire pressure gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof


High low temperature


1.5M, charging cable





Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	Built-in 500mAh charging
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	930g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	Aluminum alloy

BW-L03E

High precision
charging tire pressure gauge


Detecting tire pressure


Not affected by light



LED display


Inflation/deflation


Shockproof


High low temperature


1.5M, charging cable





1. Pressure unit
2. Exhaust valve
3. Air inlet
4. Sheath
5. Pressure display
6. ON/OFF UNIT
7. Inflation valve
8. Inflate chuck
9. Charging port

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	Built-in 500mAh charging
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	930g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	Aluminum alloy

DP-002

High precision

Tire pressure inflator gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof



High low temperature



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm



1. Pressure unit
2. ON/OFF
3. Inflation valve
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. UNIT
9. Exhaust valve
10. Inflate chuck
11. Battery cover

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	680g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

DP-101

High precision

Tire pressure inflator gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof


High low temperature

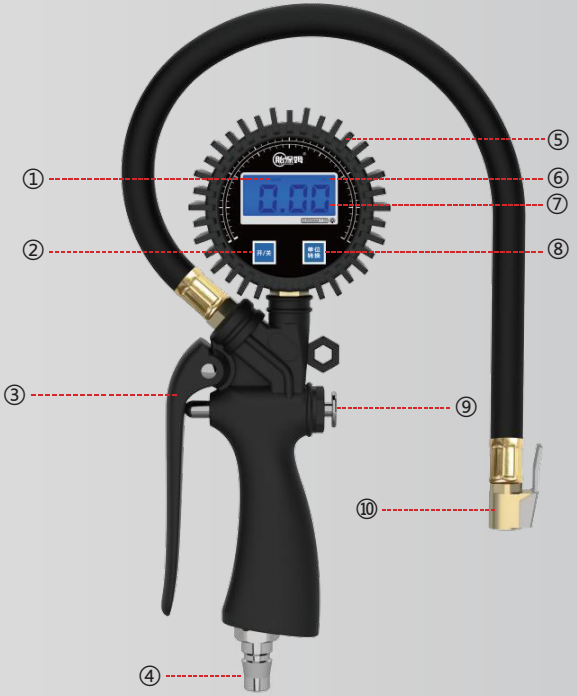

Packaging parameters		
	Packing Size	Carton size(50PCS/CTN)
	250*110*45mm	57*27*48.5cm



1. Pressure unit
2. ON/OFF
3. Inflation valve
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. UNIT
9. Exhaust valve
10. Inflate chuck
11. Battery cover

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	420g(Including 0.4M air Pipe)
Measuring range	5~100PSI/0.35~7BAR	Material	PA66+30%GF

DP-201

High precision

Tire pressure inflator gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof


High low temperature



Packaging parameters		
	Packing Size	Carton size(50PCS/CTN)
	250*110*45mm	57*27*48.5cm



Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	415g(Including 0.4M air Pipe)
Measuring range	5~100PSI/0.35~7BAR	Material	PA66+30%GF

DP-202

High precision

silicone oil tire pressure gauge

Detecting tire pressure

High voltage resistance

Pure copper movement

Inflation/deflation

Shockproof

High low temperature

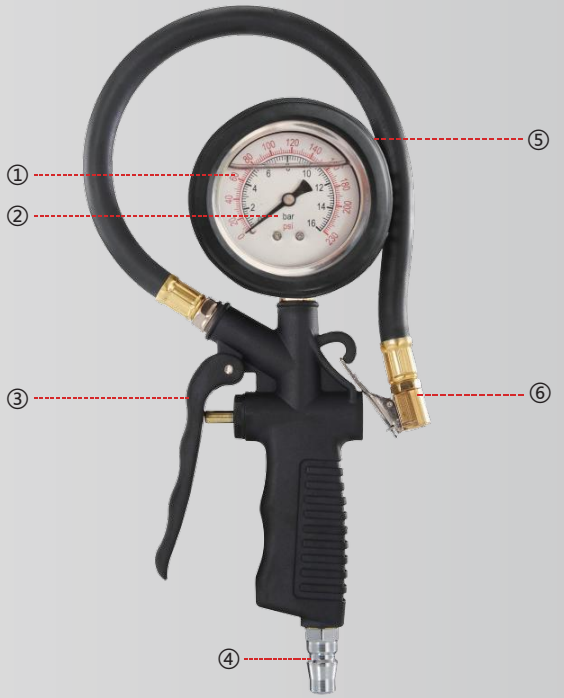

1. Pressure display
2. Pressure unit
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Inflate chuck

Packaging parameters		
	Packing Size	Carton size(50PCS/CTN)
	250*110*45mm	57*27*48.5cm

Applicable Vehicle	Motorcycles, Car,Van	Movement	Copper
Display Mode	YN65MM(silicone oil) 2.5"	Accuracy	5%
Storage temperature	-10 ~ +50℃	Precision resolution	1PSI/0.2BAR
Working temperature	-20 ~ +60℃	Gross weight	495g(Including 0.4M air Pipe)
Measuring range	0~230PSI/0~16BAR	Material	PA66+30%GF

DP-203

High precision
mechanical tire pressure gauge

Detecting tire pressure

High voltage resistance

Pure copper movement

Inflation/deflation

Shockproof

High low temperature

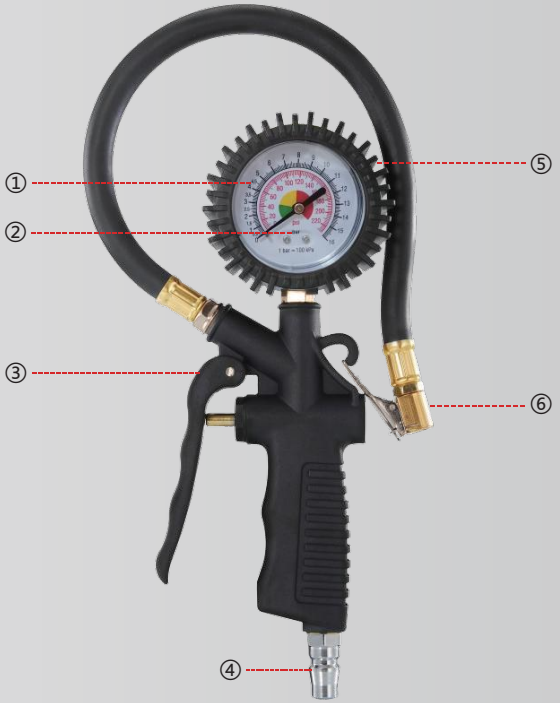

1. Pressure display
2. Pressure unit
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Inflate chuck

Packaging parameters		
	Packing Size	Carton size(50PCS/CTN)
	250*110*45mm	57*27*48.5cm

Applicable Vehicle	Motorcycles, Car,Van	Movement	Copper
Display Mode	YN63MM	Accuracy	5%
Storage temperature	-10 ~ +50℃	Precision resolution	1PSI/0.2BAR
Working temperature	-20 ~ +60℃	Gross weight	380g(Including 0.4M air Pipe)
Measuring range	0~230PSI/0~16BAR	Material	PA66+30%GF

DP-208

High precision

Tire pressure inflator gauge

Detecting tire pressure

LED Night lighting

LCD display

Inflation/deflation

Shockproof

High low temperature



1. Pressure unit
2. ON/OFF
3. Exhaust valve
4. Inflation valve
5. Air inlet
6. Sheath
7. Battery status
8. Pressure display
9. UNIT
10. Inflate chuck
11. Battery cover



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	248*91*85mm	49*26.5*51.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	690g(Including 0.5M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	Aluminum alloy

DP-208E

High precision

Tire pressure inflator gauge

Detecting tire pressure

Not affected by light

LED display

Inflation/deflation

Shockproof

High low temperature



1. Pressure unit
2. ON/OFF UNIT
3. Exhaust valve
4. Inflation valve
5. Air inlet
6. Sheath
7. Battery status
8. Pressure display
9. Inflate chuck
10. Battery cover



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	248*91*85mm	49*26.5*51.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	670g(Including 0.5M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	Aluminum alloy

DP-702

High precision
silicone oil tire pressure gauge

Detecting tire pressure

High voltage resistance

Pure copper movement

Inflation/deflation

Shockproof

High low temperature



1. Pressure display
2. Pressure unit
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Inflate chuck

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Movement	Copper
Display Mode	YN65MM(silicone oil) 2.5"	Accuracy	5%
Storage temperature	-10 ~ +50℃	Precision resolution	1PSI/0.2BAR
Working temperature	-20 ~ +60℃	Gross weight	730g(Including 0.4M air Pipe)
Measuring range	0~230PSI/0~16BAR	Material	PA66+30%GF

DP-704

High precision
mechanical tire pressure gauge

Detecting tire pressure

High voltage resistance

Pure copper movement

Inflation/deflation

Shockproof

High low temperature

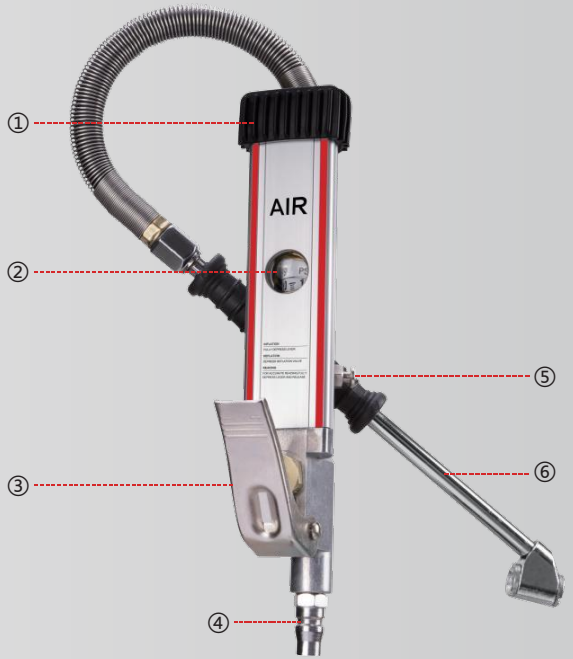

1. Sheath
2. Pressure display
3. Inflation valve
4. Air inlet
5. Exhaust valve
6. Gas filling rod

Packaging parameters		
	Packing Size	Carton size(24PCS/CTN)
	395*160*60mm	57*41.5*35.5cm

Applicable Vehicle	Motorcycles, Car,Van	Movement	Copper
Display Mode	Gas gauge type	Accuracy	5%
Storage temperature	-10 ~ +50℃	Precision resolution	1PSI/0.2BAR
Working temperature	-20 ~ +60℃	Gross weight	785g(Including 0.4M air Pipe)
Measuring range	< 160PSI	Material	Aluminum alloy

DP-703D

High precision

Tire pressure inflator gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof



High low temperature



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm



1. Pressure unit
2. ON/OFF
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. UNIT
9. Inflate chuck
10. Battery cover

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	750g(Including 0.6M air Pipe)
Measuring range	0~230PSI/0~16BAR	Material	PA66+30%GF

DP-703E

High precision

Tire pressure inflator gauge

Detecting tire pressure

Not affected by light

LED display

Inflation/deflation

Shockproof

High low temperature



1. Pressure unit
2. ON/OFF UNIT
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. Inflate chuck
9. Battery cover



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	770g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

DP-708

High precision

Tire pressure inflator gauge


Detecting tire pressure


LED Night lighting



LCD display


Inflation/deflation


Shockproof


High low temperature



1. Sheath
2. Pressure display
3. Pressure unit
4. ON/OFF UNIT
5. Exhaust valve
6. Inflate chuck
7. Inflation valve
8. Air inlet
9. Battery cover
10. Gas filling rod

Packaging parameters



Packing Size	Carton size(30PCS/CTN)
297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LCD	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	920g(Including 0.5M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	Aluminum alloy

DP-808

High precision
charging tire pressure gauge

Detecting tire pressure

Not affected by light

LED display

Inflation/deflation

Shockproof

High low temperature

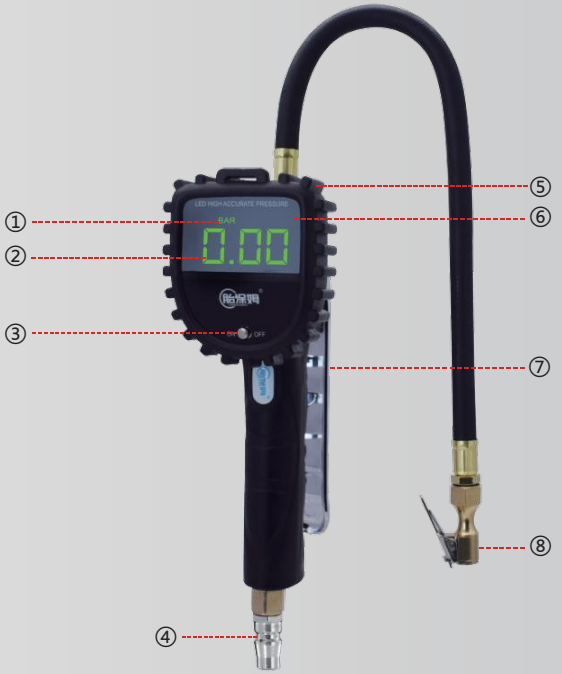



1. Pressure unit
2. Pressure display
3. ON/OFF UNIT
4. Air inlet
5. Sheath
6. Battery status
7. Inflate/Deflate switch
8. Inflate chuck
9. Type-c charging port

Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	Built-in 500mAh charging
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	750g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

TB-801

High precision
charging tire pressure gauge


Detecting tire pressure


Not affected by light



LED display


Inflation/deflation


Shockproof



High low temperature


1.5M, charging cable





1. Battery Level	7. ON/OFF UNIT
2. Exhaust valve	8. Inflation valve
3. Air inlet	9. Inflate chuck
4. Sheath	10. Charging port
5. Pressure display	
6. Pressure unit	

Packaging parameters



Packing Size	Carton size(30PCS/CTN)
297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	Built-in 500mAh charging
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	960g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

TB-802

High precision

Tire pressure inflator gauge

Detecting tire pressure

Not affected by light

LED display

Inflation/deflation

Shockproof

High low temperature

Handle color



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm



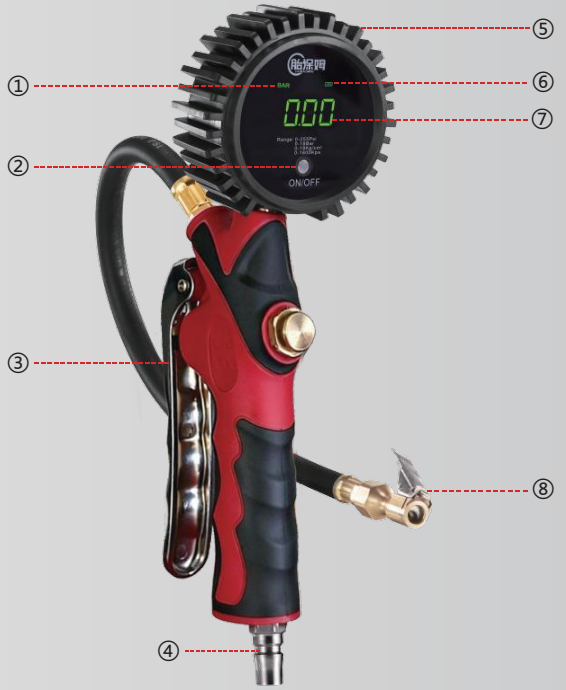

1. Pressure unit
2. ON/OFF UNIT
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. Inflate chuck
9. Battery cover

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	730g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF

TB-805

High precision

Tire pressure inflator gauge


Detecting tire pressure


Not affected by light



LED display


Inflation/deflation


Shockproof


High low temperature

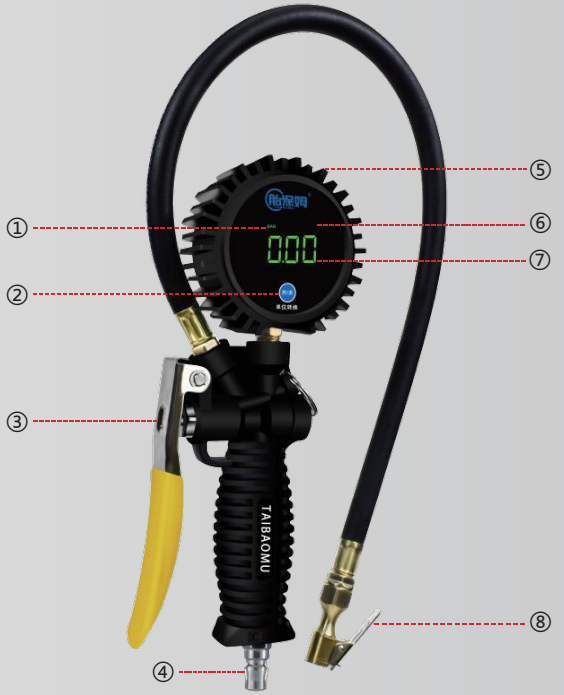

1. Pressure unit
2. ON/OFF UNIT
3. Inflate/Deflate switch
4. Air inlet
5. Sheath
6. Battery status
7. Pressure display
8. Inflate chuck
9. Battery cover



Packaging parameters		
	Packing Size	Carton size(30PCS/CTN)
	297*136*83mm	62.5*43.5*44.5cm

Applicable Vehicle	Motorcycles, Car,Van	Power supply mode	AAA*2
Display Mode	LED	Accuracy	±0.5PSI/±0.03BAR
Storage temperature	-10 ~ +50℃	Precision resolution	0.1PSI/0.01BAR
Working temperature	-20 ~ +60℃	Gross weight	685g(Including 0.6M air Pipe)
Measuring range	5~230PSI/0.35~16BAR	Material	PA66+30%GF



DP-T01

Display Mode	⌀63 LCD
Power supply mode	AAA*2
Ranger	100PSI/7BAR
Accuracy	±0.5PSI/±0.03BAR
Gross weight	235g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm



DP-T02

Display Mode	⌀63 LCD
Power supply mode	AAA*2
Ranger	255PSI/18BAR
Accuracy	±0.5PSI/±0.03BAR
Gross weight	360g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm



DP-T03

Display Mode	⌀70 LCD
Power supply mode	AAA*2
Ranger	255PSI/18BAR
Accuracy	±0.5PSI/±0.03BAR
Gross weight	355g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm



DP-T04

Display Mode	⌀70 LED
Power supply mode	AAA*2
Ranger	255PSI/18BAR
Accuracy	±0.5PSI/±0.03BAR
Gross weight	425g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm



DP-T05

Display Mode	⌀50 LCD
Power supply mode	CR-2032*1
Ranger	70PSI/5BAR
Accuracy	±0.5PSI/±0.03BAR
Gross weight	125g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm



DP-T06

Display Mode	YN50MM
Movement	Copper
Ranger	230PSI/16BAR
Accuracy	1PSI/0.2BAR
Gross weight	150g
Packing quantity	50PCS/CTN
Carton size	57*27*48.5cm

Thread size can be customized

⌀63MM 2.45"		
	Display Mode	⌀63 LCD
	Power supply mode	AAA*2
	Ranger	100PSI/7BAR
	Accuracy	±0.5PSI/±0.03BAR
	Gross weight	135g
	Packing quantity	100PCS/CTN
DP-B03	Carton size	44.5*35*19.5cm

⌀63MM 2.45"		
	Display Mode	⌀63 LCD
	Power supply mode	AAA*2
	Ranger	255PSI/18BAR
	Accuracy	±0.5PSI/±0.03BAR
	Gross weight	135g
	Packing quantity	100PCS/CTN
DP-B04	Carton size	44.5*35*19.5cm

⌀70MM 2.75"		
	Display Mode	⌀70 LCD
	Power supply mode	AAA*2
	Ranger	255PSI/18BAR
	Accuracy	±0.5PSI/±0.03BAR
	Gross weight	155g
	Packing quantity	100PCS/CTN
DP-B05	Carton size	44.5*35*19.5cm

⌀70MM 2.75"		
	Display Mode	⌀70 LED
	Power supply mode	AAA*2
	Ranger	255PSI/18BAR
	Accuracy	±0.5PSI/±0.03BAR
	Gross weight	180g
	Packing quantity	100PCS/CTN
DP-B06	Carton size	44.5*35*19.5cm



DP-G40



DP-G60



DP-G10M

Can be customized according to needs



DP-A01



DP-A02



DP-A03



DP-A10



WG-PU10-12M

Product name	Spring inflatable tube
Material	PU
Product size	12M
Outside diameter	⌀10mm
Gross weight	580g
Packing quantity	50
Carton size	--



WG-QG

Product name	Air drum
Material	Metal+Silicone
Product size	7M/12M
Colour	Red/Black
Gross weight	3KG
Packing quantity	1
Carton size	8.9*8.5*6.3 Inch



WG-CXQ

Product name	Blower/vacuum gun
Material	zinc alloy
Purpose	Blow/Vacuum
Gas flow	50L/H
Gross weight	340g
Packing quantity	1PCS
Carton size	16.5*15.5*6.5cm



WG-JHQ

Product name	Equalizer
Material	PVC
Purpose	Tire inflation
Pipe length	14M
Gross weight	1.1KG
Packing quantity	1PCS
Carton size	--

压力换算表
PRESSURE CONVERSION TABLE

Name	Psi	Kgf/cm^2	Bar	Kpa
1Psi	1	0.070	0.068	6.895
$1Kgf/cm^2$	14.223	1	0.980	98.066
1bar	14.503	1.019	1	100
1Kpa	0.145	0.010	0.01	1

压力单位名称
PRESSURE NAME

ENGLISH NAME	中文单位名称
1Psi	巴斯
$1Kgf/cm^2$	千克力/平方厘米
1bar	巴
1Kpa	千帕